


WaterHog® Plus

→ ENTRANCE MAT • INDOOR & OUTDOOR

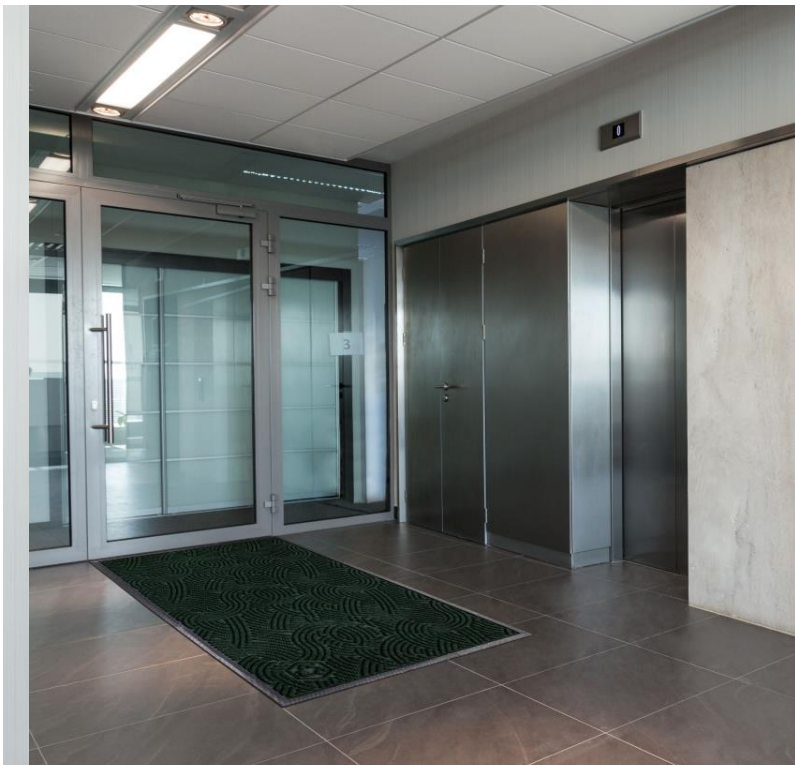

→ WHY CHOOSE THIS MAT?

WaterHog® Plus mats are durable, stain-resistant mats with a unique bi-level design that traps dirt and moisture, keeping your floors clean, dry, and safe.

- **Clean & Dry** – Raised nubs remove dirt and moisture from shoes and trap it below foot level, holding it on the mat below shoe level so they are not tracked onto floors. Face Nubs are reinforced with rubber to resist crushing, maintaining high performance and extending product life
- **Eco-Friendly** – Solution-Dyed PET carpet made from 100% recycled plastic bottles. The rubber backing is PVC-Free and there is 34% postindustrial recycled content in the rubber polymer
- **Absorbs up to 4L/m²** – The unique raised rubber waterdam borders are designed to hold water and dirt on the mat keeping it off carpets and floors
- **Durable** – Reinforced rubber nubs prevent pile from crushing and extend the performance life of the mat
- **Fade & Stain Resistant** – Solution-dyed PET fabric is resistant to stain & light, dries quickly, and will not fade or rot
- **Easy to Clean and Maintain** – Simply use commercial cleaning machines, vacuum, high pressure cleaner or steam clean
- **Indoor/Outdoor:** Durable anti-static P.E.T. face suitable for indoor or outdoor use. Not adversely affected by salt or ice melt. P.E.T. fiber system dries quickly

→ SPECIFICATIONS

| | |
|-------------------------|--|
| Yarn | Needle-Punched, Solution dyed, post-consumer recycled P.E.T. <ul style="list-style-type: none">• Carpet weight: 1020 g/m² |
| Backing | <ul style="list-style-type: none">• Rubber backing: 100% nitrile rubber with 34% post-industrial recycled content in the polymer – phthalate free – Compression-molded with reinforced borders on all four sides.• Backing thickness: 2,3 mm• Backing weight: 2.980 g/m² |
| Border | <ul style="list-style-type: none">• Only available with rubber border• Border thickness: 4,5 mm |
| Other properties | <ul style="list-style-type: none">• Total weight: 4 kg/m²• Rubber nub height: 6,4 mm• Durometer: 65• Tensile: 1800• Static Control: Antistatic• Flammability: Passes Flammability Standard of carpets and rugs FF-2-70. |
| Recommended use | Recommended for indoor and outdoor for commercial use at entryways, in lobbies, at front desks or anywhere additional traction or moisture control is needed. |

Size Tolerance: +/- 2% / **Weight Tolerance:** +/- 5%



100%
post-consumer
recycled PET




**Bi-level
surface traps
dirt & water**




**Absorbs up
to 4L/m²**



**Waterdam
border**



**Indoor &
outdoor**



Easy to clean




→ STANDARD SIZES

| | | | |
|--------|---------|---------|---------|
| 60x90* | 90x150* | 115x175 | 175x360 |
| 90x120 | 90x295 | 115x240 | |

* Black smoke is in stock for these sizes

→ COLOUR & PATTERN



Black smoke
swirl pattern

→ **CLEANING INSTRUCTIONS**



WaterHog® Plus mats can be cleaned in several different ways:

1. Commercially laundered (see Laundering Instructions)
2. Vacuumed regularly (daily in high-traffic areas; weekly in lower-traffic applications)
3. Extract or hose off as needed to remove heavy soil/debris

Hang mat to dry. Always make sure the mat is dry before placing it back in service.

Laundering Instructions

1. Flush 2-3 minutes, high water level, 120 degrees F (49 degrees C)
2. Break 5 minutes, high water level, 120 degrees F (49 degrees C)
3. Rinse 2 minutes, high water level, 120 degrees F (49 degrees C)
4. Rinse 2 minutes, high water level, 120 degrees F (49 degrees C)
5. Extract (low speed) 2 minutes
6. Shake out (rotate the wheel at wash speed with the drain open) 1 minute
7. Extract (high speed max - 250 Gs) 3-5 minutes

Additional recommendations

- This formula does not require drying, however, the mats can be dried if necessary
- Lay mats flat following removal from the washer
- If you dry mats in the dryer, allow cooling before rolling